
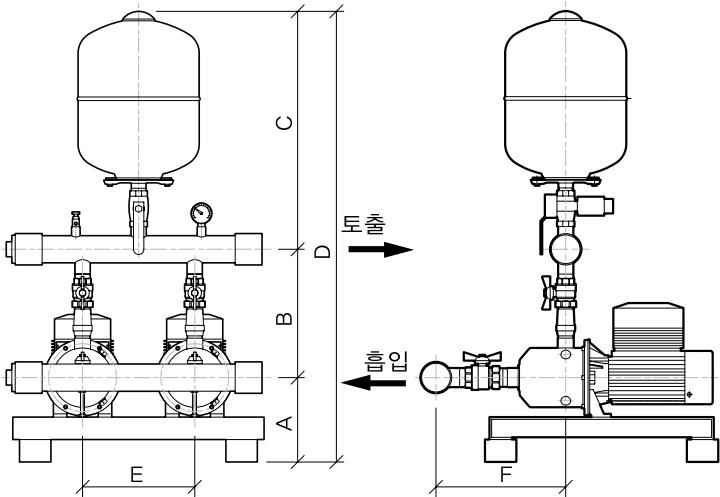


Dual 황형, 220V – WPMS 5000YM

외형도

성능곡선도

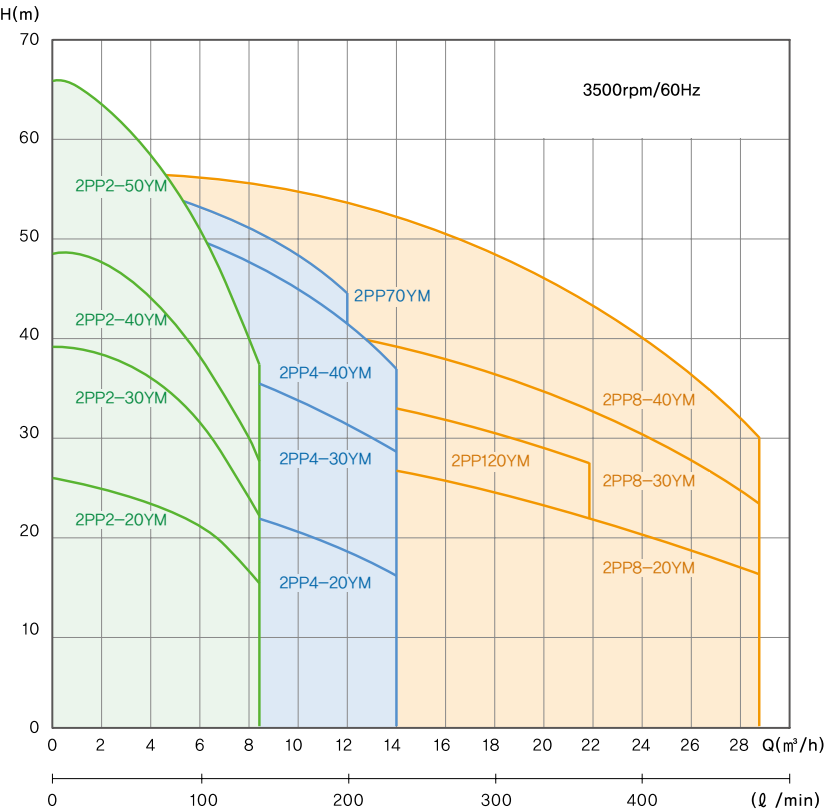

사양선정표

모델	출력 (kW)	유량 (m³/h)	최대양정 (m)	구경 (mm)		외형치수 (mm)						중량 (kg)
				흡 입	토 출	A	B	C	D	E	F	
2PP2-20YM	0.55	8.4	25.5	50	50	188	286	530	1004	250	220	40
2PP2-30YM	0.75	8.4	39	50	50	188	286	530	1004	250	220	42
2PP2-40YM	0.75	8.4	51	50	50	188	286	530	1004	250	274	44
2PP2-50YM	0.9	8.4	66	50	50	188	286	530	1004	250	274	46
2PP4-20YM	0.75	14	26	50	50	188	286	565	1039	250	235	40
2PP4-30YM	0.9	14	40	50	50	188	286	530	1004	250	289	42
2PP4-40YM	1.5	14	53	50	50	188	286	530	1004	250	289	44
2PP8-20YM	1.5	28.8	32	65	65	220	395	538	1153	250	306	58
2PP8-30YM	2.2	28.8	46	65	65	220	395	538	1153	250	306	62
2PP8-40YM	2.2	28.8	56	65	65	220	395	538	1153	250	366	68
2PP70YM	1.82	14.4	62	65	50	220	330	530	1080	250	255	62
2PP120YM	1.82	21.6	38	65	50	220	330	530	1080	250	220	58